

3280 10.0
NATIONAL BUREAU OF STANDARDS REPORT

5280

SELF-HEATING CHARACTERISTICS OF A SOLID PROPELLANT

by

JOSEPH LOFTUS



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

THE NATIONAL BUREAU OF STANDARDS

Functions and Activities

The functions of the National Bureau of Standards are set forth in the Act of Congress, March 3, 1901, as amended by Congress in Public Law 619, 1950. These include the development and maintenance of the national standards of measurement and the provision of means and methods for making measurements consistent with these standards; the determination of physical constants and properties of materials; the development of methods and instruments for testing materials, devices, and structures; advisory services to Government Agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; and the development of standard practices, codes, and specifications. The work includes basic and applied research, development, engineering, instrumentation, testing, evaluation, calibration services, and various consultation and information services. A major portion of the Bureau's work is performed for other Government Agencies, particularly the Department of Defense and the Atomic Energy Commission. The scope of activities is suggested by the listing of divisions and sections on the inside of the back cover.

Reports and Publications

The results of the Bureau's work take the form of either actual equipment and devices or published papers and reports. Reports are issued to the sponsoring agency of a particular project or program. Published papers appear either in the Bureau's own series of publications or in the journals of professional and scientific societies. The Bureau itself publishes three monthly periodicals, available from the Government Printing Office: The Journal of Research, which presents complete papers reporting technical investigations; the Technical News Bulletin, which presents summary and preliminary reports on work in progress; and Basic Radio Propagation Predictions, which provides data for determining the best frequencies to use for radio communications throughout the world. There are also five series of nonperiodical publications: The Applied Mathematics Series, Circulars, Handbooks, Building Materials and Structures Reports, and Miscellaneous Publications.

Information on the Bureau's publications can be found in NBS Circular 460, Publications of the National Bureau of Standards (\$1.25) and its Supplement (\$0.75), available from the Superintendent of Documents, Government Printing Office, Washington 25, D. C.

Inquiries regarding the Bureau's reports should be addressed to the Office of Technical Information, National Bureau of Standards, Washington 25, D. C.

NATIONAL BUREAU OF STANDARDS REPORT

NBS PROJECT

NBS REPORT

1002-30-4873

May 10, 1957

5280

SELF-HEATING CHARACTERISTICS OF A SOLID PROPELLANT

by

JOSEPH LOFTUS

for
Bureau of Ships
Department of the Navy

Code 538

Index Number NS-183-001

IMPORTANT NOTICE

NATIONAL BUREAU OF STANDARDS
intended for use within the Government
to additional evaluation and re-
listing of this Report, either in
the Office of the Director, National
Bureau of Standards, or, however,
by the Government or any agency
to reproduce additional copies

Approved for public release by the
Director of the National Institute of
Standards and Technology (NIST)
on October 9, 2015.

Progress accounting documents
publically published it is subjected
reproduction, or open-literature
information is obtained in writing from
Such permission is not needed,
prepared if that agency wishes



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

SELF-HEATING CHARACTERISTICS OF A SOLID PROPELLANT

ABSTRACT

A brief study was made of the self-heating characteristics of a solid double-base propellant. The method of determination and the behavior of the propellant as compared with several common materials are described.

1. INTRODUCTION

A current extensive research investigation, designed to assist in the solution of fire hazard problems associated with the military use of a variety of fuels and oxidizing agents, includes a study of the ignition properties of solid propellants. In connection with this program, particularly as concerned with possible hazards in the storage of propellant materials, a study of the self-heating characteristics of a representative double-base solid propellant has been made.

2. MATERIAL

The propellant furnished by the Navy was designated as AFN 3336, and was cast into wafers 2 inches in diameter and $\frac{1}{8}$ inch thick.

3. TESTS AND RESULTS

The material was tested in a small automatic furnace designed for study of the self-heating characteristics of poorly conducting materials. The furnace and its controls were constructed to maintain a furnace temperature closely following, at all times, that of the center of the specimen. Thus, loss of heat from the specimen became negligible, and the whole specimen was

allowed to heat at the same rate. The conditions established approach, therefore, those which exist in an infinitely large sample of the material, and permit a study of the behavior which may be expected in large quantity or highly insulated storage.

The test specimen with thermocouples mounted at the center and near the surface was mounted within the furnace chamber. The air temperature within the furnace was indicated by a thermocouple mounted below the specimen, and during the initial warm up period a constant selected furnace temperature was maintained by a thermostatic controller. After the interior of the specimen had attained the temperature of the air in the furnace chamber, any further increase in the specimen temperature automatically disconnected the thermostatic controller and initiated operation of a servo-controller which supplies heat as needed to maintain the smallest possible temperature difference between the interior of the specimen and the gases in the furnace. A continuous chart of the temperatures within the specimen and in the furnace was obtained by means of an automatic recorder and the specimen temperature was plotted against time to give a time-temperature curve characteristic of the material. A more convenient expression of the data may be developed in the form

$$\ln \frac{dT}{dt} = \ln \frac{A}{\rho c} - \frac{1}{T}$$

where T = absolute temperature
 t = time
 A = a constant
 ρ = density of the specimen
 c = specific heat
 Q = an activation constant divided by the gas constant,

from which it is evident that $\ln \frac{dT}{dt}$ plotted against $\frac{1}{T}$ gives a straight line having a slope of $-Q$ and intercepting the $\ln \frac{A}{\rho c}$ axis at $\ln \frac{A}{\rho c}$.

The propellant test specimens were made up into cylinders of 2 inch length and 2 inch diameter by stacking four wafers, one upon the other. The weight of the test specimen assembly was 163 grams. The furnace was set at approximately 104°C and increased above that temperature only when heating within the specimen actuated the automatic follow-up controls. Under those conditions the propellant materials required about 10 hours to self-heat to ignition.

The results of the propellant tests are given in Figure 1, together with those of similar tests on nitrocellulose, wood fiberboard and linseed oil. The curves show the rate of temperature rise in the specimen after self-heating had started and the automatic follow-up regulation of the furnace had become operative. Curves at higher values of reciprocal temperature indicate self-heating at relatively lower temperatures. Comparative rates of self-heating may be read directly from the graph, as illustrated at the following temperatures.

Material	Rate of Self Heating		
	110° °C/hr	127° °C/hr	140° °C/hr
APR-3336 Propellant	1.75	25	-
Nitrocellulose	—	5	25
Wood Fiberboard	—	0.8	2.2
Linseed Oil	118		

The propellant material showed self-heating at a rate approximately 6 times that of nitrocellulose and 35 times that of wood fiberboard, which commonly does not give trouble at storage temperatures up to 60°C (140°F), but has been known to ignite spontaneously when stacked hot from manufacture, without proper cooling.

4. CONCLUSION

From an initial temperature of 104°C the APB-3336 propellant material when tested as described, self-heated within 10 hours to a temperature of 159°C. At this temperature very rapid combustion set in and the sample was consumed.

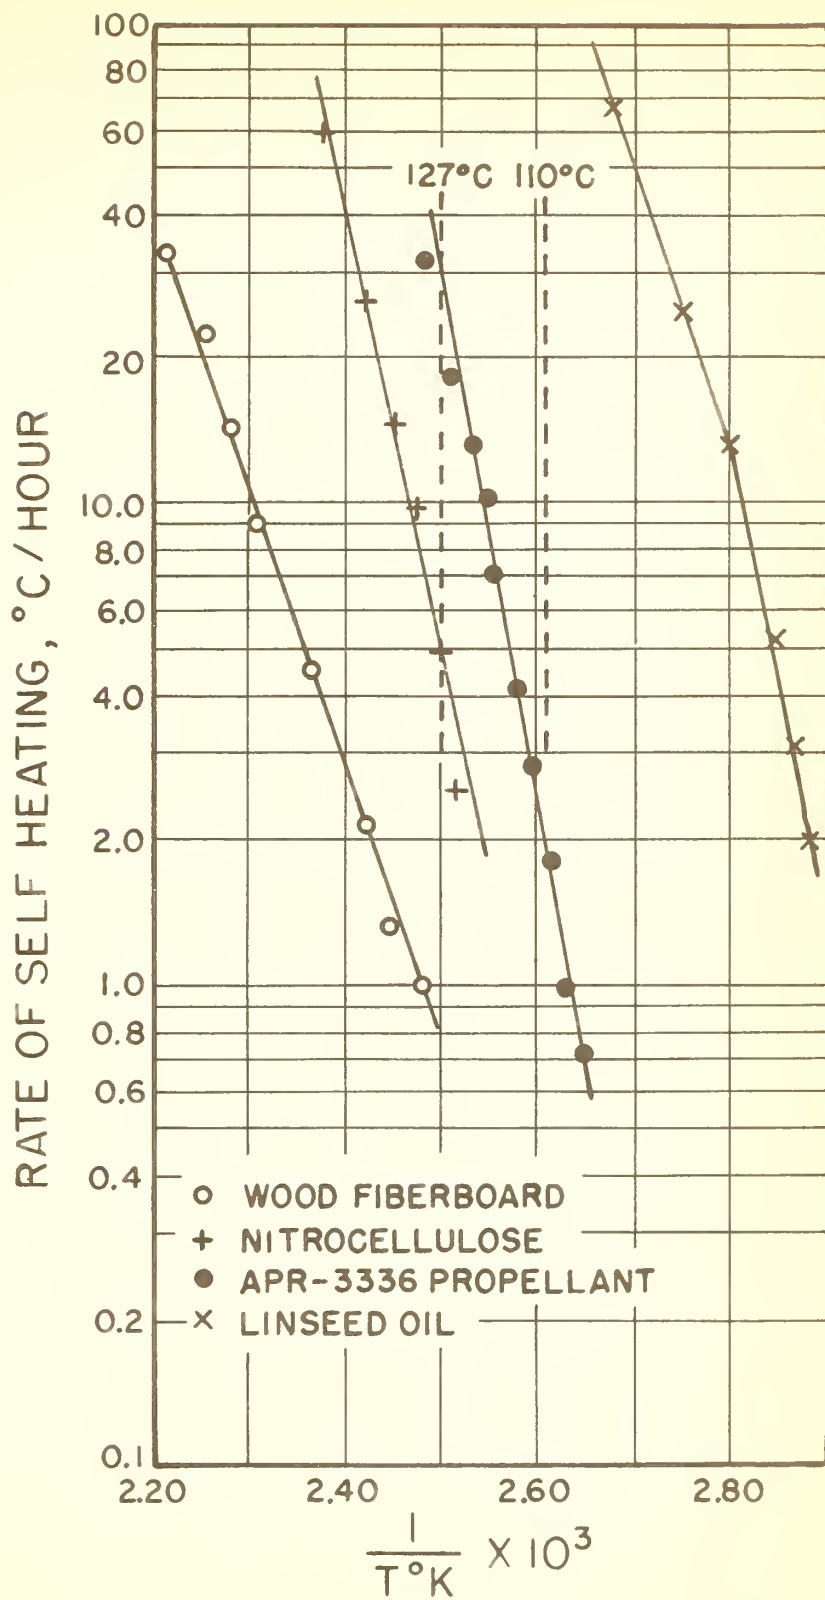


FIG. 1 SELF HEATING CHARACTERISTICS OF MATERIALS TESTED

U. S. DEPARTMENT OF COMMERCE

Sinclair Weeks, *Secretary*

NATIONAL BUREAU OF STANDARDS

A. V. Astin, *Director*



THE NATIONAL BUREAU OF STANDARDS

The scope of activities of the National Bureau of Standards at its headquarters in Washington, D. C., and its major field laboratories in Boulder, Colorado, is suggested in the following listing of the divisions and sections engaged in technical work. In general, each section carries out specialized research, development, and engineering in the field indicated by its title. A brief description of the activities, and of the resultant reports and publications, appears on the inside front cover of this report.

WASHINGTON, D. C.

Electricity and Electronics. Resistance and Reactance. Electron Tubes. Electrical Instruments. Magnetic Measurements. Dielectrics. Engineering Electronics. Electronic Instrumentation. Electrochemistry.

Optics and Metrology. Photometry and Colorimetry. Optical Instruments. Photographic Technology. Length. Engineering Metrology.

Heat and Power. Temperature Physics. Thermodynamics. Cryogenic Physics. Rheology and Lubrication. Engine Fuels.

Atomic and Radiation Physics. Spectroscopy. Radiometry. Mass Spectrometry. Solid State Physics. Electron Physics. Atomic Physics. Nuclear Physics. Radioactivity. X-rays. Betatron. Nucleonic Instrumentation. Radiological Equipment. AEC Radiation Instruments.

Chemistry. Organic Coatings. Surface Chemistry. Organic Chemistry. Analytical Chemistry. Inorganic Chemistry. Electrodeposition. Gas Chemistry. Physical Chemistry. Thermochemistry. Spectrochemistry. Pure Substances.

Mechanics. Sound. Mechanical Instruments. Fluid Mechanics. Engineering Mechanics. Mass and Scale. Capacity, Density, and Fluid Meters. Combustion Controls.

Organic and Fibrous Materials. Rubber. Textiles. Paper. Leather. Testing and Specifications. Polymer Structure. Organic Plastics. Dental Research.

Metallurgy. Thermal Metallurgy. Chemical Metallurgy. Mechanical Metallurgy. Corrosion. Metal Physics.

Mineral Products. Engineering Ceramics. Glass. Refractories. Enameled Metals. Concreting Materials. Constitution and Microstructure.

Building Technology. Structural Engineering. Fire Protection. Heating and Air Conditioning. Floor, Roof, and Wall Coverings. Codes and Specifications.

Applied Mathematics. Numerical Analysis. Computation. Statistical Engineering. Mathematical Physics.

Data Processing Systems. SEAC Engineering Group. Components and Techniques. Digital Circuitry. Digital Systems. Analogue Systems. Application Engineering.

• Office of Basic Instrumentation

• Office of Weights and Measures

BOULDER, COLORADO

Cryogenic Engineering. Cryogenic Equipment. Cryogenic Processes. Properties of Materials. Gas Liquefaction.

Radio Propagation Physics. Upper Atmosphere Research. Ionospheric Research. Regular Propagation Services. Sun-Earth Relationships.

Radio Propagation Engineering. Data Reduction Instrumentation. Modulation Systems. Navigation Systems. Radio Noise. Tropospheric Measurements. Tropospheric Analysis. Radio Systems Application Engineering.

Radio Standards. Radio Frequencies. Microwave Frequencies. High Frequency Electrical Standards. Radio Broadcast Service. High Frequency Impedance Standards. Calibration Center. Microwave Physics. Microwave Circuit Standards.

